

Single Pack BD50F 10-45V DC Solar PM

Single pack code number: **195B4333**

| Position | Title | Code | Amount |
|----------|--|----------|--------|
| 1 | Compressor BD50F | 101Z1220 | 1 |
| 2 | Electronic unit 10-45 DC - Solar | 101N0420 | 1 |
| 3 | Bolt joint for one compressor M6 ø16mm | 118-1917 | 1 |

Secop GmbH • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • www.secop.com

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved.

Performance Data with Refrigerant R134a

| Capacity (EN 12900 Household/CECOMAF) | | | | | | | | | | | | |
|---------------------------------------|------|------|-------|------|------|------|------|------|------|------|------|----|
| 12V DC, static cooling | | | | | | | | | | | watt | |
| rpm \ °C | -30 | -25 | -23.3 | -20 | -15 | -10 | -5 | 0 | 5 | 7.2 | 10 | 15 |
| 2,000 | 20.9 | 30.1 | 33.8 | 41.8 | 56.1 | 72.8 | 92.1 | 114 | 138* | 150* | 165* | |
| 2,500 | 26.1 | 37.0 | 41.4 | 50.9 | 68.0 | 88.7 | 113 | 142* | 175* | 191* | | |
| 3,000 | 31.2 | 44.8 | 50.2 | 61.8 | 82.4 | 107 | 136* | 169* | | | | |
| 3,500 | 37.0 | 52.0 | 58.0 | 71.1 | 94.7 | 123* | 157* | | | | | |

| Capacity (ASHRAE LBP) | | | | | | | | | | | | |
|------------------------|------|------|-------|------|------|------|------|------|------|------|------|----|
| 12V DC, static cooling | | | | | | | | | | | watt | |
| rpm \ °C | -30 | -25 | -23.3 | -20 | -15 | -10 | -5 | 0 | 5 | 7.2 | 10 | 15 |
| 2,000 | 25.9 | 37.2 | 41.8 | 51.7 | 69.3 | 90.0 | 114 | 141 | 171* | 185* | 205* | |
| 2,500 | 32.3 | 45.9 | 51.3 | 63.1 | 84.3 | 110 | 140 | 176* | 217* | 237* | | |
| 3,000 | 38.5 | 55.4 | 62.0 | 76.4 | 102 | 132 | 168* | 210* | | | | |
| 3,500 | 45.5 | 64.2 | 71.6 | 87.8 | 117 | 152* | 194* | | | | | |

| Power consumption | | | | | | | | | | | | |
|------------------------|------|------|-------|------|------|-------|-------|-------|-------|-------|-------|----|
| 12V DC, static cooling | | | | | | | | | | | watt | |
| rpm \ °C | -30 | -25 | -23.3 | -20 | -15 | -10 | -5 | 0 | 5 | 7.2 | 10 | 15 |
| 2,000 | 25.0 | 31.6 | 33.8 | 38.0 | 44.3 | 50.8 | 57.7 | 65.3 | 73.8* | 77.9* | 83.5* | |
| 2,500 | 30.7 | 39.5 | 42.4 | 48.0 | 56.5 | 64.9 | 73.4 | 82.0* | 90.9* | 94.9* | | |
| 3,000 | 37.4 | 48.1 | 51.6 | 58.3 | 68.3 | 78.1 | 87.9* | 98.0* | | | | |
| 3,500 | 45.0 | 56.8 | 60.7 | 68.2 | 79.5 | 91.2* | 104* | | | | | |

| Current consumption (for 24V applications the following must be halved) | | | | | | | | | | | | |
|---|-----|-----|-------|-----|-----|------|------|------|------|------|------|----|
| 12V DC, static cooling | | | | | | | | | | | A | |
| rpm \ °C | -30 | -25 | -23.3 | -20 | -15 | -10 | -5 | 0 | 5 | 7.2 | 10 | 15 |
| 2,000 | 2.1 | 2.6 | 2.8 | 3.1 | 3.7 | 4.3 | 4.9 | 5.6 | 6.3* | 6.6* | 7.1* | |
| 2,500 | 2.6 | 3.2 | 3.5 | 3.9 | 4.6 | 5.4 | 6.1 | 6.9* | 7.6* | 8.0* | | |
| 3,000 | 3.2 | 4.0 | 4.3 | 4.8 | 5.6 | 6.5 | 7.3* | 8.2* | | | | |
| 3,500 | 3.9 | 4.7 | 5.0 | 5.6 | 6.6 | 7.6* | 8.7* | | | | | |

| COP (EN 12900 Household/CECOMAF) | | | | | | | | | | | | |
|----------------------------------|------|------|-------|------|------|-------|-------|-------|-------|-------|-------|----|
| 12V DC, static cooling | | | | | | | | | | | W/W | |
| rpm \ °C | -30 | -25 | -23.3 | -20 | -15 | -10 | -5 | 0 | 5 | 7.2 | 10 | 15 |
| 2,000 | 0.84 | 0.95 | 1.00 | 1.10 | 1.27 | 1.43 | 1.60 | 1.74 | 1.87* | 1.92* | 1.97* | |
| 2,500 | 0.85 | 0.94 | 0.98 | 1.06 | 1.20 | 1.37 | 1.54 | 1.73* | 1.92* | 2.01* | | |
| 3,000 | 0.83 | 0.93 | 0.97 | 1.06 | 1.21 | 1.37 | 1.54* | 1.72* | | | | |
| 3,500 | 0.82 | 0.92 | 0.96 | 1.04 | 1.19 | 1.35* | 1.51* | | | | | |

| COP (ASHRAE LBP) | | | | | | | | | | | | |
|------------------------|------|------|-------|------|------|-------|-------|-------|-------|-------|-------|----|
| 12V DC, static cooling | | | | | | | | | | | W/W | |
| rpm \ °C | -30 | -25 | -23.3 | -20 | -15 | -10 | -5 | 0 | 5 | 7.2 | 10 | 15 |
| 2,000 | 1.04 | 1.19 | 1.25 | 1.37 | 1.58 | 1.79 | 1.99 | 2.18 | 2.34* | 2.40* | 2.47* | |
| 2,500 | 1.05 | 1.16 | 1.21 | 1.32 | 1.50 | 1.70 | 1.93 | 2.16* | 2.41* | 2.52* | | |
| 3,000 | 1.03 | 1.15 | 1.21 | 1.32 | 1.50 | 1.71 | 1.93* | 2.16* | | | | |
| 3,500 | 1.01 | 1.13 | 1.18 | 1.29 | 1.48 | 1.68* | 1.89* | | | | | |

| Test conditions with electronic units | | EN 12900/CECOMAF | ASHRAE LBP |
|---------------------------------------|----------------------------------|------------------|------------|
| Condensing temperature | 101N0242 101N0510 101N0680 | 55°C | 54.4°C |
| Ambient temperature | | 32°C | 32°C |
| Suction gas temperature | | 32°C | 32°C |
| Liquid temperature | | no subcooling | 32°C |

| Accessories for BD50F | | Code number |
|----------------------------|--|----------------------------|
| Bolt joint for one comp. | Ø:16 mm | 118-1917 |
| Bolt joint in quantities | Ø:16 mm | 118-1918 |
| Snap-on in quantities | Ø:16 mm | 118-1919 |
| Remote kit (without cable) | | 105N9210 |
| Secop Gateway | | 105N9518 |
| DC usage: | Automobile fuse, DIN 7258 12V: 15A 24V: 7.5 A Main switch | Not deliverable from Secop |
| AC usage: | Fuse, 100-240V Main switch | |

| Compressor speed | | |
|-------------------|-------------------|-------------|
| Electronit unit | Resistor (R1) [Ω] | Motor speed |
| Code number | calculated values | [rpm] |
| 101N0242 | 0 | 2,000 |
| 101N0510 | 277 | 2,500 |
| 101N0680 | 692 | 3,000 |
| | 1523 | 3,500 |
| 101N0340 with AEO | 0 | AEO |
| | 173 | 2,000 |
| | 450 | 2,500 |
| | 865 | 3,000 |
| | 1696 | 3,500 |


In AEO (Adaptive Energy Optimizing) speed mode the BD compressor will always adapt its speed to the actual cooling demand.

| Wire dimensions DC | | | | | | |
|--------------------|-------|---------|----------------------------|-------|----------------------------|-------|
| Cross section | Size | | Max. length* 12V operation | | Max. length* 24V operation | |
| | [mm²] | [Gauge] | [m] | [ft.] | [m] | [ft.] |
| 2.5 | 12 | | 2.5 | 8 | 5 | 16 |
| 4 | 12 | | 4 | 13 | 8 | 26 |
| 6 | 10 | | 6 | 20 | 12 | 39 |
| 10 | 8 | | 10 | 33 | 20 | 66 |

*Length between battery and electronic unit

Wire dimensions AC
Cross section min. 0.75 mm² or AWG 18

| Operational errors | |
|---------------------------|--|
| Error code or LED flashes | Error type |
| | Can be read out in the software TOOL4COOL® |
| 6 | Thermostat failure (If the NTC thermistor is short-circuit or has no connection). |
| 5 | Thermal cut-out of electronic unit (If the refrigeration system has been too heavily loaded, or if the ambient temperature is high, the electronic unit will run too hot). |
| 4 | Minimum motor speed error (If the refrigeration system is too heavily loaded, the motor cannot maintain minimum speed at approximately 1,850 rpm). |
| 3 | Motor start error (The rotor is blocked or the differential pressure in the refrigeration system is too high (>5 bar)). |
| 2 | Too many start attempts or fan over current (Too many compressor or fan starts in short time or fan current higher than 0.5A _{avg}). |
| 1 | Battery protection cut-out (The voltage is outside the cut-out setting). |

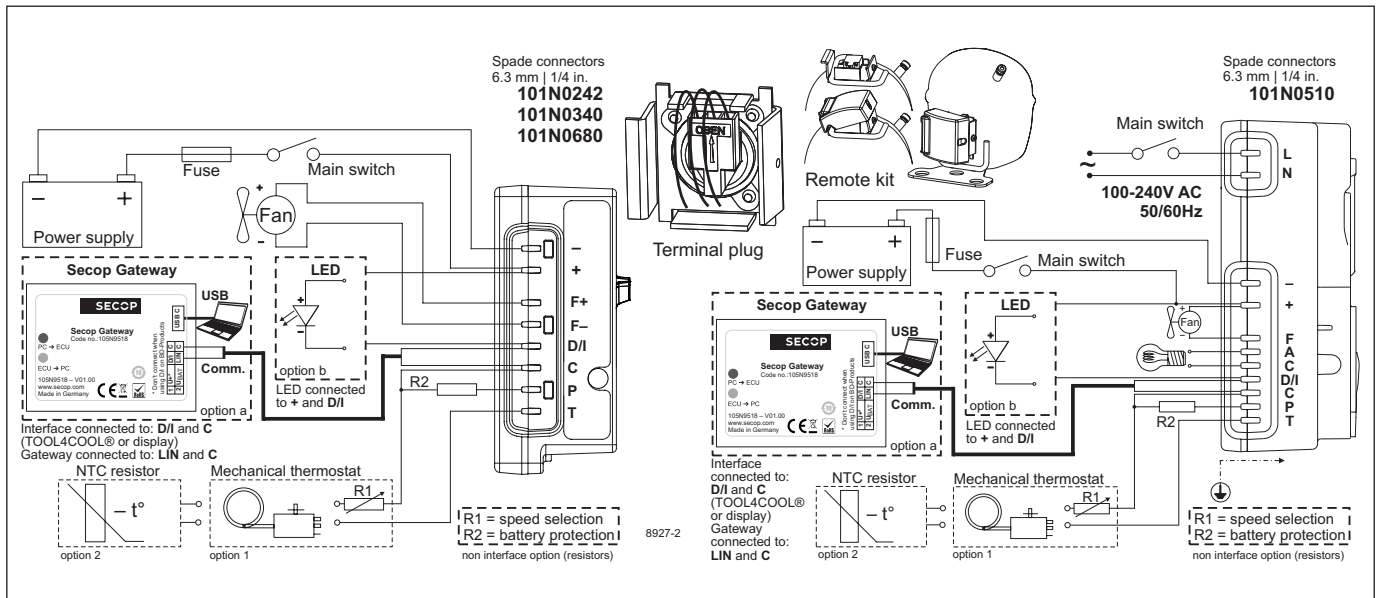

Performance Data with Refrigerant R1234yf

| Capacity (EN 12900 Household/CECOMAF) | | | | | | | | | | | | |
|---------------------------------------|------|------|-------|------|------|------|------|------|------|------|------|----|
| 12V DC, static cooling | | | | | | | | | | | watt | |
| rpm \ °C | -30 | -25 | -23.3 | -20 | -15 | -10 | -5 | 0 | 5 | 7.2 | 10 | 15 |
| 2,000 | 23.4 | 32.3 | 35.9 | 43.5 | 56.7 | 72.1 | 89.7 | 109 | 131* | 142* | 155* | |
| 2,500 | 28.9 | 39.6 | 43.8 | 52.8 | 68.8 | 88.0 | 110 | 136* | 166* | 181* | | |
| 3,000 | 34.7 | 48.0 | 53.1 | 64.1 | 83.4 | 106 | 133* | 163* | | | | |
| 3,500 | 42.1 | 57.6 | 63.6 | 76.5 | 99.0 | 126* | 156* | | | | | |

| Capacity (ASHRAE LBP) | | | | | | | | | | | | |
|------------------------|------|------|-------|------|------|------|------|------|------|------|------|----|
| 12V DC, static cooling | | | | | | | | | | | watt | |
| rpm \ °C | -30 | -25 | -23.3 | -20 | -15 | -10 | -5 | 0 | 5 | 7.2 | 10 | 15 |
| 2,000 | 30.1 | 41.6 | 46.2 | 56.0 | 73.1 | 93.0 | 116 | 141 | 170* | 183* | 201* | |
| 2,500 | 37.3 | 51.1 | 56.5 | 68.2 | 88.9 | 114 | 143 | 177* | 216* | 235* | | |
| 3,000 | 44.6 | 61.7 | 68.4 | 82.6 | 108 | 137 | 171* | 211* | | | | |
| 3,500 | 54.2 | 74.1 | 81.9 | 98.5 | 128 | 162* | 202* | | | | | |

| Power consumption | | | | | | | | | | | | |
|------------------------|------|------|-------|------|------|-------|-------|-------|-------|-------|-------|----|
| 12V DC, static cooling | | | | | | | | | | | watt | |
| rpm \ °C | -30 | -25 | -23.3 | -20 | -15 | -10 | -5 | 0 | 5 | 7.2 | 10 | 15 |
| 2,000 | 26.7 | 32.8 | 34.9 | 39.0 | 45.3 | 51.8 | 58.5 | 65.5 | 72.9* | 76.2* | 80.5* | |
| 2,500 | 33.3 | 42.0 | 44.9 | 50.5 | 58.8 | 66.9 | 74.8 | 82.4* | 89.7* | 92.8* | | |
| 3,000 | 40.1 | 50.7 | 54.2 | 60.9 | 70.7 | 80.2 | 89.5* | 98.4* | | | | |
| 3,500 | 49.1 | 59.9 | 63.6 | 70.8 | 82.0 | 93.6* | 106* | | | | | |

| Current consumption (for 24V applications the following must be halved) | | | | | | | | | | | | |
|---|-----|-----|-------|-----|-----|------|------|------|------|------|------|----|
| 12V DC, static cooling | | | | | | | | | | | A | |
| rpm \ °C | -30 | -25 | -23.3 | -20 | -15 | -10 | -5 | 0 | 5 | 7.2 | 10 | 15 |
| 2,000 | 2.2 | 2.7 | 2.9 | 3.2 | 3.8 | 4.3 | 4.9 | 5.5 | 6.1* | 6.3* | 6.7* | |
| 2,500 | 2.8 | 3.5 | 3.7 | 4.2 | 4.9 | 5.6 | 6.2 | 6.9* | 7.5* | 7.7* | | |
| 3,000 | 3.3 | 4.2 | 4.5 | 5.1 | 5.9 | 6.7* | 7.5* | 8.2* | | | | |
| 3,500 | 4.1 | 5.0 | 5.3 | 5.9 | 6.8 | 7.8* | 8.8* | | | | | |

| COP (EN 12900 Household/CECOMAF) | | | | | | | | | | | | |
|----------------------------------|------|------|-------|------|------|-------|-------|-------|-------|-------|-------|----|
| 12V DC, static cooling | | | | | | | | | | | W/W | |
| rpm \ °C | -30 | -25 | -23.3 | -20 | -15 | -10 | -5 | 0 | 5 | 7.2 | 10 | 15 |
| 2,000 | 0.87 | 0.98 | 1.02 | 1.11 | 1.24 | 1.38 | 1.52 | 1.65 | 1.78* | 1.84* | 1.91* | |
| 2,500 | 0.87 | 0.94 | 0.97 | 1.04 | 1.17 | 1.31 | 1.47 | 1.64* | 1.84* | 1.93* | | |
| 3,000 | 0.87 | 0.94 | 0.98 | 1.05 | 1.17 | 1.31 | 1.47* | 1.64* | | | | |
| 3,500 | 0.86 | 0.96 | 1.00 | 1.08 | 1.20 | 1.33* | 1.47* | | | | | |

| COP (ASHRAE LBP) | | | | | | | | | | | | |
|------------------------|------|------|-------|------|------|-------|-------|-------|-------|-------|-------|----|
| 12V DC, static cooling | | | | | | | | | | | W/W | |
| rpm \ °C | -30 | -25 | -23.3 | -20 | -15 | -10 | -5 | 0 | 5 | 7.2 | 10 | 15 |
| 2,000 | 1.13 | 1.27 | 1.33 | 1.44 | 1.61 | 1.80 | 1.98 | 2.16 | 2.33* | 2.41* | 2.50* | |
| 2,500 | 1.12 | 1.22 | 1.26 | 1.35 | 1.51 | 1.70 | 1.91 | 2.15* | 2.41* | 2.53* | | |
| 3,000 | 1.11 | 1.22 | 1.26 | 1.36 | 1.52 | 1.71 | 1.92* | 2.14* | | | | |
| 3,500 | 1.10 | 1.24 | 1.29 | 1.39 | 1.56 | 1.73* | 1.91* | | | | | |

* fan cooling of electronic unit compulsory

| Test conditions with electronic units | | EN 12900/CECOMAF | ASHRAE LBP |
|---------------------------------------|----------------------------------|------------------|------------|
| Condensing temperature | 101N0242 101N0510 101N0680 | 55°C | 54.4°C |
| Ambient temperature | | 32°C | 32°C |
| Suction gas temperature | | 32°C | 32°C |
| Liquid temperature | | no subcooling | 32°C |

| Accessories for BD50F | | Code number |
|----------------------------|--|----------------------------|
| Bolt joint for one comp. | Ø:16 mm | 118-1917 |
| Bolt joint in quantities | Ø:16 mm | 118-1918 |
| Snap-on in quantities | Ø:16 mm | 118-1919 |
| Remote kit (without cable) | | 105N9210 |
| Secop Gateway | | 105N9518 |
| DC usage: | Automobile fuse, DIN 7258 12V: 15A 24V: 7.5 A Main switch | Not deliverable from Secop |
| AC usage: | Fuse, 100-240V Main switch | |

Compressor speed

| Electronit unit | Resistor (R1) [Ω] | Motor speed |
|-------------------|-------------------|-------------|
| Code number | calculated values | [rpm] |
| 101N0242 | 0 | 2,000 |
| 101N0510 | 277 | 2,500 |
| 101N0680 | 692 | 3,000 |
| | 1523 | 3,500 |
| 101N0340 with AEO | 0 | AEO |
| | 173 | 2,000 |
| | 450 | 2,500 |
| | 865 | 3,000 |
| | 1696 | 3,500 |

In AEO (Adaptive Energy Optimizing) speed mode the BD compressor will always adapt its speed to the actual cooling demand.

Wire dimensions DC

| Cross section | Size | | Max. length* 12V operation | | Max. length* 24V operation | |
|---------------|-------|---------|----------------------------|-------|----------------------------|-------|
| | [mm²] | [Gauge] | [m] | [ft.] | [m] | [ft.] |
| 2.5 | 12 | | 2.5 | 8 | 5 | 16 |
| 4 | 12 | | 4 | 13 | 8 | 26 |
| 6 | 10 | | 6 | 20 | 12 | 39 |
| 10 | 8 | | 10 | 33 | 20 | 66 |


*Length between battery and electronic unit

Wire dimensions AC

Cross section min. 0.75 mm² or AWG 18

Operational errors

| Error code or LED flashes | Error type |
|---------------------------|--|
| | Can be read out in the software TOOL4COOL® |
| 6 | Thermostat failure (If the NTC thermistor is short-circuit or has no connection). |
| 5 | Thermal cut-out of electronic unit (If the refrigeration system has been too heavily loaded, or if the ambient temperature is high, the electronic unit will run too hot). |
| 4 | Minimum motor speed error (If the refrigeration system is too heavily loaded, the motor cannot maintain minimum speed at approximately 1,850 rpm). |
| 3 | Motor start error (The rotor is blocked or the differential pressure in the refrigeration system is too high (>5 bar)). |
| 2 | Too many start attempts or fan over current (Too many compressor or fan starts in short time or fan current higher than 0.5A _{avg}). |
| 1 | Battery protection cut-out (The voltage is outside the cut-out setting). |

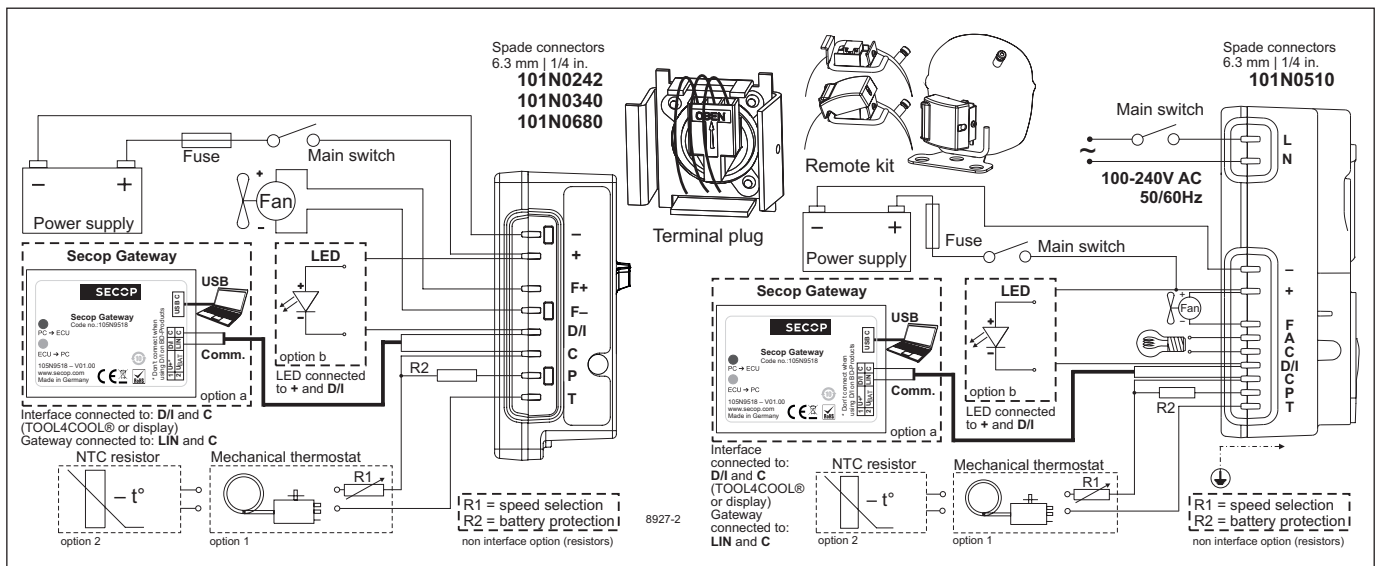

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved. www.secop.com



Instructions for Electronic Units
are available for download on
www.secop.com



BD Compressors



Service/Repair



BD Nano




! max. 150°C/302°F !
at socket


brazing solder: silver with flux

Do not heat up the bottom of the discharge connector directly.
Do not braze longer than 10 seconds and wait for 5 minutes for the next soldering attempt (Product Bulletin DES.N.101.M1).


BD Micro

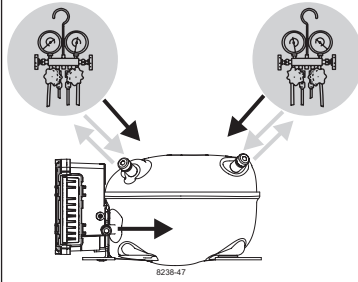

BD P-Housing

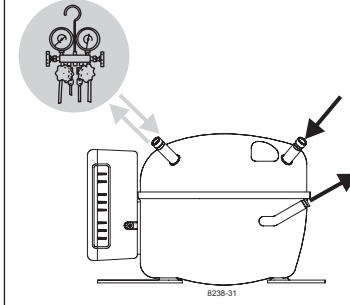

BD T-Housing

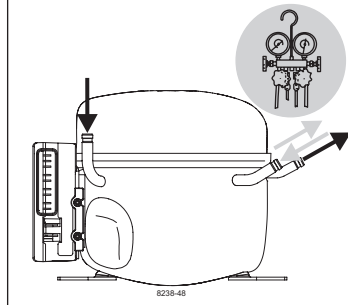

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved. www.secop.com