

Model

| | | | | |
|-------------|------------------|-----------------------------------|-------------|-----------------|
| Designation | KLF6.6MFT | 200-240V/50Hz 1~ 208-230V/60Hz 1~ | Sales code: | 106G2701 |
|-------------|------------------|-----------------------------------|-------------|-----------------|

Compressor design

| | | | |
|----------------------------|---------------------------------|-----------------------|-------------------------------|
| Oil type | Polyolester | Refrigerant(s) | R134a |
| Oil viscosity | 9,7cST | Displacement | 6,6cm ³ / 0,4cu.in |
| Oil quantity | 170cm ³ / 5,7fl.oz | Compressors on pallet | 100 |
| Refr. charge - tech. limit | 400g / 14,1oz | | |
| Free gas volume comp. | 1580cm ³ / 53,4fl.oz | | |
| Weight | 9,4kg / 20,7lbs | | |
| Motor protection | external | | |
| Winding resistance main | 8,4Ω (at 25°C) | | |
| Winding resistance aux | 11,9Ω (at 25°C) | | |
| Max. winding temp. | 125°C / 257°F | | |
| Max. discharge temp. | 130°C / 266°F | | |



General - Configurations with KLF6.6MFT

| | Conf. 1 | Conf. 2 | Conf. 3 | Conf. 4 |
|------------------------|--|----------------|----------------|----------------|
| Motorconfiguration | CSIR | RSCR | CSIR | RSCR |
| Power supply (nominal) | 200-240V/50Hz | 200-240V/50Hz | 208-230V/60Hz | 208-230V/60Hz |
| Number of phases | 1 | 1 | 1 | 1 |
| Voltage range | 170-254V | 170-254V | 198-253V | 198-253V |
| Approvals | VDE, UL, CCC | VDE, UL, CCC | VDE, UL, CCC | VDE, UL, CCC |
| Starting torque | HST | LST | HST | LST |
| Note | Compressor can operate safely in LBP, no official third-party approval yet | | | |

Applications with KLF6.6MFT

| | Conf. 1 | Conf. 2 | Conf. 3 | Conf. 4 |
|-------------------------|----------------|----------------|----------------|----------------|
| Refrigerant | R134a | R134a | R134a | R134a |
| Application | MBP | MBP | MBP | MBP |
| System cooling | fan 3m/s | fan 3m/s | fan 3m/s | fan 3m/s |
| Hot gas defrost | OK | OK | OK | OK |
| Long interval pull down | OK | OK | OK | OK |

Electrical data - Configurations with KLF6.6MFT

| | Conf. 1 | Conf. 2 | Conf. 3 | Conf. 4 |
|------------------------------|----------------|----------------|----------------|----------------|
| Starting device type | relay | PTC | relay | PTC |
| Run capacitor | -/- | 5μF | -/- | 5μF |
| Start capacitor | 80μF | -/- | 80μF | -/- |
| LRA (locked rotor amps / 4s) | 12,3A | 11A | 12,3A | 11A |
| RLA (rated load amps / 1s) | 2,1A | 2,1A | 2,1A | 2,1A |
| Cut in current | 12,3A | 18,1A | 12,3A | 18,1A |

Model

Designation

KLF6.6MFT

200-240V/50Hz 1~ 208-230V/60Hz 1~


Sales code:

106G2701


Compressor dimensions

| Housing | A Height | 182mm / 7,17in |
|---------|-------------------|----------------|
| | B Height | 175mm / 6,89in |
| | C Length shell | 198mm / 7,8in |
| | D Length w. cover | 238mm / 9,37in |
| | E Width | 160mm / 6,3in |

| Connectors | | Suction | Discharge | Process |
|------------------|----------------------------|--------------|--------------|--------------|
| | | X | Y | Z |
| Diameter | [mm] | øi 8,11-8,29 | øi 6,11-6,29 | øi 6,11-6,29 |
| | (i:inside, o:outside) [in] | øi 0,32-0,33 | øi 0,24-0,25 | øi 0,24-0,25 |
| Material | | copper | copper | copper |
| Horizontal angle | ±2° | 35° | 13° | 0° |
| Vertical angle | ±2° | 30° | 40° | 145° |
| Position l/h/w | [mm] | 120/72/62 | 112/106/62 | -97/102/70 |
| | [in] | 4,7/2,8/2,4 | 4,4/4,2/2,4 | -3,8/4/2,8 |
| Straight tube l. | [mm] | 14 | 14 | 14 |
| | [in] | 0,5 | 0,5 | 0,5 |

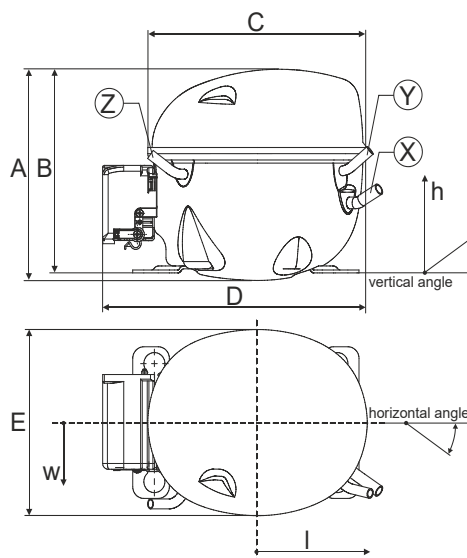


Compressor fixation

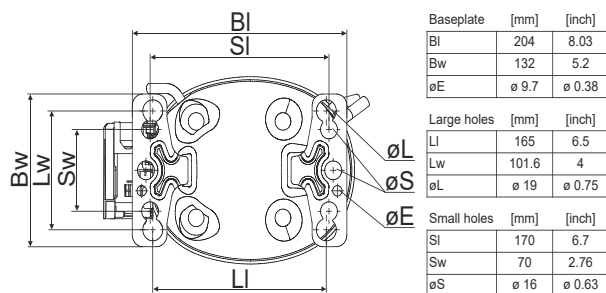

Bolt joint



Snap-on

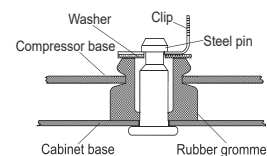

Mounting accessories

| | one comp. | multi pack |
|----------------------------|-----------|------------|
| Bolt joint M6 ø16mm | 118-1917 | 118-1918 |
| Bolt joint ø1/4" ø16mm | 118-1946 | |
| Bolt joint ø1/4" ø19mm | 118-1949 | |
| Snap-on ø7,3 ø16mm | 118-1947 | 118-1919 |

Application notes

Provision for PE Grounding is located at the PE Stamp on the compressor

LRA value on compressor label and datasheet may differ due to different test conditions for UL approval.

Model


| | | | | | |
|-------------|------------------|----------------------|----------------|-------------|-----------------|
| Designation | KLF6.6MFT | 200-240V/50Hz | Conf. 1 | Sales code: | 106G2701 |
|-------------|------------------|----------------------|----------------|-------------|-----------------|

Configuration

| | |
|------------------------|------------------|
| Motorconfiguration | CSIR |
| Power supply (nominal) | 200-240V/50Hz 1~ |
| Refrigerant | R134a |
| Application | MBP |
| Voltage range | 170-254V |
| Starting torque | HST |
| Approvals | VDE |
| | UL |
| | CCC |

Electrical accessories / wiring diagram

CSIR


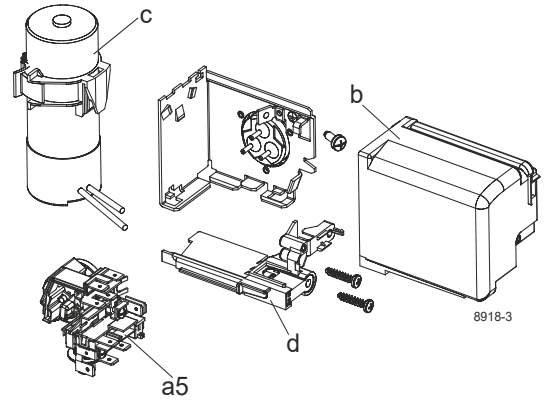


Ambient/ machine room temperatures minimum /maximum



| | |
|---------------------------------|------------------------|
| Ambient temperature range: | 10 - 43°C / 50 - 110°F |
| Machine room temperature range: | 10 - 48°C / 50 - 119°F |

Compressor cooling: fan 3m/s

Compressor with external protector. For max. operation envelope cooling on protector.

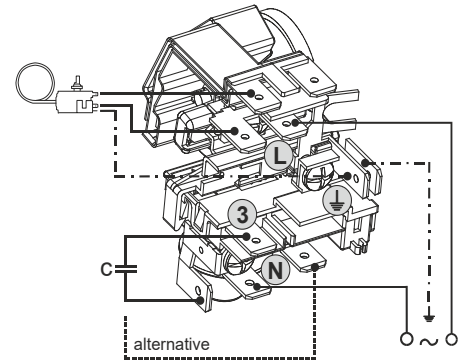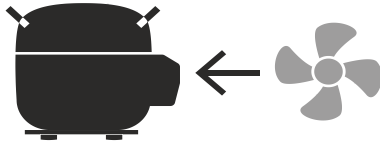

Operation pressure range

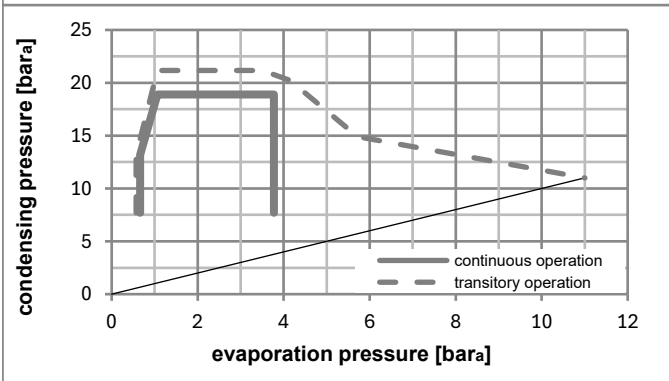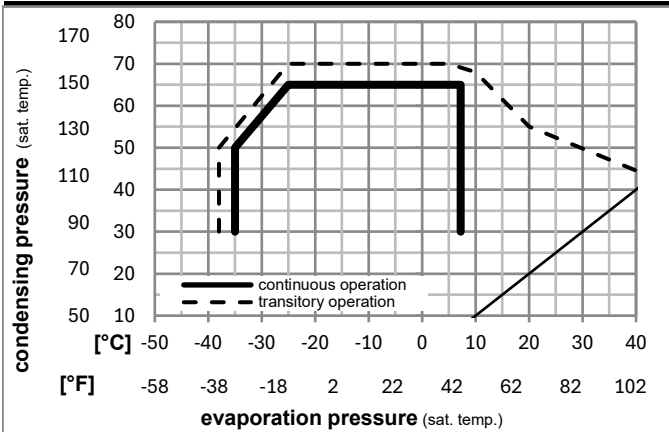

Components

| | | |
|------|------------------------------------|----------|
| a5 | current relay TY (T0377/L6-S1) | 117U7071 |
| c | start capacitor (80µF, 6.3mm) | 117U5001 |
| b, d | cover + clamp + screws(5VA) in bag | 103N1060 |

Alternative components

| | | |
|------|------------------------------------|----------|
| b, d | cover + clamp + screws(5VA-compl.) | 103N0600 |
|------|------------------------------------|----------|

Model

| | | | | | |
|-------------|------------------|----------------------|---------|-------------|-----------------|
| Designation | KLF6.6MFT | 200-240V/50Hz | Conf. 1 | Sales code: | 106G2701 |
|-------------|------------------|----------------------|---------|-------------|-----------------|

Optimization + standard conditions

R134a, 200V/50Hz, CSIR, fan 3m/s, VDE, UL, CCC

| | Evaporating pressure (saturation temperature) | | | | Condensing pressure (saturation temperature) | | | COP | EER | | | Power consumption | | ASHRAE LBP |
|------|---|-----|-----|------|--|---------|----------|------|-------|----------|-----------|-------------------|--------|-------------|
| | pe | pc | RGT | Tliq | [W] | [Btu/h] | [kcal/h] | | [W/W] | [Btu/Wh] | [kcal/Wh] | P1 | I | |
| [°C] | | | | | | | | | | | [W] | [A] | [kg/h] | |
| [°F] | | | | | | | | | | | | | | |
| | -23 | 54 | 32 | 32 | 186,7 | 638 | 160,7 | 1,35 | 4,62 | 1,16 | 138,0 | 1,27 | 3,63 | ASHRAE LBP |
| | -10 | 130 | 90 | 90 | | | | | | | | | | |
| | -25 | 55 | 32 | 55 | 136,5 | 466 | 117,4 | 1,04 | 3,57 | 0,90 | 130,6 | 1,25 | 3,26 | cecomaf LBP |
| | -13 | 131 | 90 | 131 | | | | | | | | | | |
| | -35 | 40 | 20 | 40 | 93,1 | 318 | 80,1 | 1,02 | 3,47 | 0,88 | 91,5 | 1,17 | 2,04 | EN12900 LBP |
| | -31 | 104 | 68 | 104 | | | | | | | | | | |
| | -7 | 54 | 35 | 46 | 401,5 | 1371 | 345,5 | 1,92 | 6,57 | 1,65 | 208,8 | 1,49 | 8,76 | ASHRAE MBP |
| | 20 | 130 | 95 | 115 | | | | | | | | | | |
| | -10 | 55 | 32 | 55 | 309,8 | 1058 | 266,6 | 1,58 | 5,41 | 1,36 | 195,8 | 1,45 | 7,49 | cecomaf MBP |
| | 14 | 131 | 90 | 131 | | | | | | | | | | |
| | -10 | 45 | 20 | 45 | 347,3 | 1186 | 298,9 | 1,94 | 6,64 | 1,67 | 178,7 | 1,38 | 8,13 | EN12900 MBP |
| | 14 | 113 | 68 | 113 | | | | | | | | | | |

Performance tables

R134a, 200V/50Hz, CSIR, fan 3m/s, VDE, UL, CCC

| | pe | | Cooling capacity | | | COP | EER | | P1 | I | m |
|------------------|------|------|------------------|---------|----------|-------|----------|-----------|-------|------|--------|
| | [°C] | [°F] | [W] | [Btu/h] | [kcal/h] | [W/W] | [Btu/Wh] | [kcal/Wh] | [W] | [A] | [kg/h] |
| [°C / °F] | -30 | -22 | 118,8 | 406 | 102,3 | 1,09 | 3,72 | 0,94 | 109,1 | 1,20 | 2,57 |
| cond. pressure | -25 | -13 | 161,0 | 550 | 138,6 | 1,27 | 4,33 | 1,09 | 126,9 | 1,24 | 3,49 |
| pc= 45/113 | -15 | 5 | 280,8 | 959 | 241,7 | 1,74 | 5,94 | 1,50 | 161,6 | 1,33 | 6,12 |
| return gas temp. | -10 | 14 | 360,3 | 1230 | 310,1 | 2,02 | 6,88 | 1,73 | 178,7 | 1,38 | 7,89 |
| RGT= 32/90 | -5 | 23 | 454,0 | 1550 | 390,7 | 2,32 | 7,92 | 1,99 | 195,9 | 1,44 | 9,98 |
| liquid temp | 0 | 32 | 562,7 | 1922 | 484,3 | 2,64 | 9,02 | 2,27 | 213,1 | 1,51 | 12,45 |
| Tliq= 45/113 | 7,2 | 45 | 747,8 | 2554 | 643,5 | 3,14 | 10,71 | 2,70 | 238,5 | 1,60 | 16,70 |
| [°C / °F] | -30 | -22 | 99,2 | 339 | 85,3 | 0,92 | 3,14 | 0,79 | 107,7 | 1,19 | 2,37 |
| cond. pressure | -25 | -13 | 136,5 | 466 | 117,4 | 1,04 | 3,57 | 0,90 | 130,6 | 1,25 | 3,26 |
| pc= 55/131 | -15 | 5 | 240,9 | 823 | 207,3 | 1,38 | 4,71 | 1,19 | 174,5 | 1,37 | 5,80 |
| return gas temp | -10 | 14 | 309,8 | 1058 | 266,6 | 1,58 | 5,41 | 1,36 | 195,8 | 1,45 | 7,49 |
| RGT= 32/90 | -5 | 23 | 391,1 | 1336 | 336,6 | 1,80 | 6,16 | 1,55 | 216,7 | 1,52 | 9,51 |
| liquid temp | 0 | 32 | 485,6 | 1658 | 417,9 | 2,04 | 6,98 | 1,76 | 237,5 | 1,60 | 11,88 |
| Tliq= 55/131 | 7,2 | 45 | 646,7 | 2209 | 556,5 | 2,42 | 8,26 | 2,08 | 267,3 | 1,72 | 15,99 |

Model


| | | | | | |
|-------------|------------------|----------------------|----------------|-------------|-----------------|
| Designation | KLF6.6MFT | 200-240V/50Hz | Conf. 2 | Sales code: | 106G2701 |
|-------------|------------------|----------------------|----------------|-------------|-----------------|

Configuration

| | |
|------------------------|------------------|
| Motorconfiguration | RSCR |
| Power supply (nominal) | 200-240V/50Hz 1~ |
| Refrigerant | R134a |
| Application | MBP |
| Voltage range | 170-254V |
| Starting torque | LST |
| Approvals | VDE UL CCC |

Electrical accessories / wiring diagram

RSCR

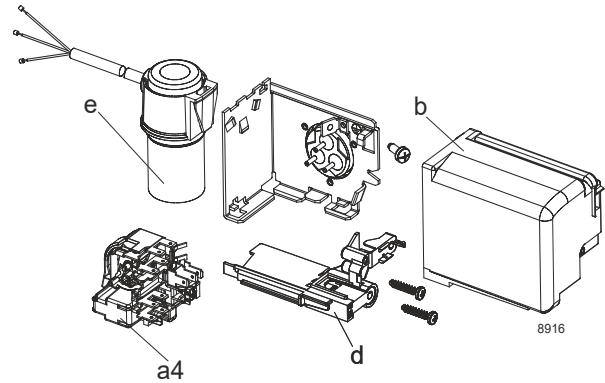



Ambient/ machine room temperatures minimum /maximum

Ambient temperature range: 10 - 43°C / 50 - 110°F



Machine room temperature range: 10 - 48°C / 50 - 119°F

Compressor cooling: fan 3m/s

Compressor with external protector. For max. operation envelope cooling on protector.

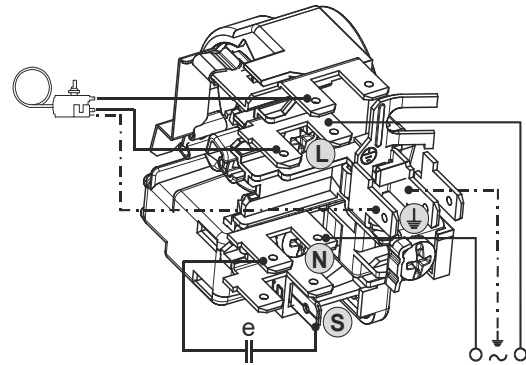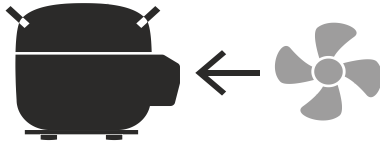

Operation pressure range

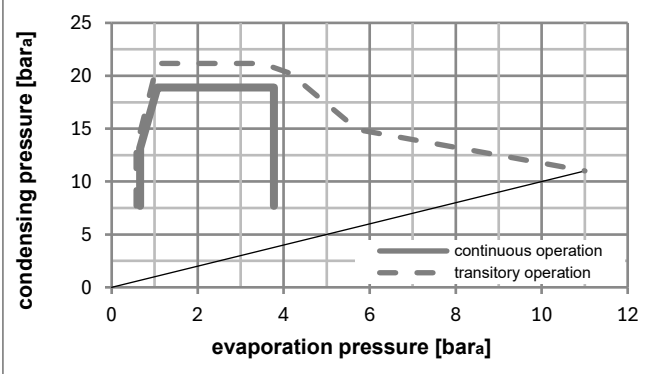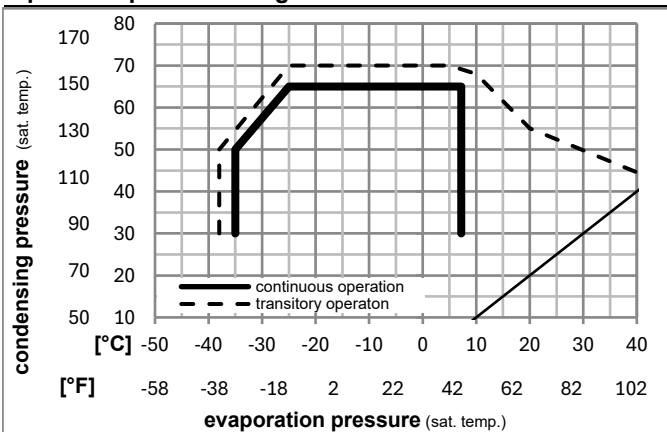

Components

| | | |
|------|------------------------------------|----------|
| a4 | DAS1 (PTC,6.3mm, T0377/L6 - S1) | 103N0250 |
| e | run capacitor (5µF, 6.3mm) | 117-7191 |
| b, d | cover + clamp + screws(5VA) in bag | 103N1060 |

Alternative components

| | | |
|----|---------------------------------|----------|
| a4 | ZAS1 (PTC,4.8mm, T0377/L6 - S1) | 103N0252 |
| e | run capacitor (5µF, 4.8mm) | 117-7190 |

| | | |
|------|------------------------------------|----------|
| b, d | cover + clamp + screws(5VA-compl.) | 103N0600 |
|------|------------------------------------|----------|

Model

| | | | | | |
|-------------|------------------|----------------------|----------------|-------------|-----------------|
| Designation | KLF6.6MFT | 200-240V/50Hz | Conf. 2 | Sales code: | 106G2701 |
|-------------|------------------|----------------------|----------------|-------------|-----------------|

Optimization + standard conditions

R134a, 200V/50Hz, RSCR, fan 3m/s, VDE, UL, CCC

| | | Evaporating pressure (saturation temperature) | | | | Cooling capacity | | | COP | | | EER | | | Power consumption | | | |
|------|-----|---|----|------------------|-------|------------------|---------|----------|-------|----------|-----------|------|------|---------------------|-------------------|-----|----------------|--|
| | | Condensing pressure (saturation temperature) | | Return gas temp. | | Liquid temp. | | | | | | | | Current consumption | | | Ref. mass flow | |
| | | pe | pc | RGT | Tliq | [W] | [Btu/h] | [kcal/h] | [W/W] | [Btu/Wh] | [kcal/Wh] | P1 | I | m | [W] | [A] | [kg/h] | |
| [°C] | -23 | 54 | 32 | 32 | 187,0 | 639 | 160,9 | 1,43 | 4,87 | 1,23 | 131,2 | 0,92 | 3,63 | ASHRAE LBP | | | | |
| [°F] | -10 | 130 | 90 | 90 | | | | | | | | | | | | | | |
| [°C] | -25 | 55 | 32 | 55 | 136,7 | 467 | 117,6 | 1,10 | 3,76 | 0,95 | 124,1 | 0,90 | 3,27 | cecomaf LBP | | | | |
| [°F] | -13 | 131 | 90 | 131 | | | | | | | | | | | | | | |
| [°C] | -35 | 40 | 20 | 40 | 93,1 | 318 | 80,2 | 1,08 | 3,68 | 0,93 | 86,4 | 0,78 | 2,04 | EN12900 LBP | | | | |
| [°F] | -31 | 104 | 68 | 104 | | | | | | | | | | | | | | |
| [°C] | -7 | 54 | 35 | 46 | 402,4 | 1374 | 346,3 | 2,03 | 6,92 | 1,74 | 198,6 | 1,19 | 8,78 | ASHRAE MBP | | | | |
| [°F] | 20 | 130 | 95 | 115 | | | | | | | | | | | | | | |
| [°C] | -10 | 55 | 32 | 55 | 310,5 | 1060 | 267,2 | 1,67 | 5,69 | 1,43 | 186,2 | 1,14 | 7,51 | cecomaf MBP | | | | |
| [°F] | 14 | 131 | 90 | 131 | | | | | | | | | | | | | | |
| [°C] | -10 | 45 | 20 | 45 | 347,9 | 1188 | 299,4 | 2,04 | 6,98 | 1,76 | 170,2 | 1,07 | 8,14 | EN12900 MBP | | | | |
| [°F] | 14 | 113 | 68 | 113 | | | | | | | | | | | | | | |

Performance tables

R134a, 200V/50Hz, RSCR, fan 3m/s, VDE, UL, CCC

| | pe | | Cooling capacity | | | COP | | | EER | | | P1 | I | m |
|------------------|------|------|------------------|---------|----------|-------|----------|-----------|-------|------|--------|----|---|---|
| | [°C] | [°F] | [W] | [Btu/h] | [kcal/h] | [W/W] | [Btu/Wh] | [kcal/Wh] | [W] | [A] | [kg/h] | | | |
| [°C / °F] | -30 | -22 | 119,0 | 406 | 102,4 | 1,15 | 3,93 | 0,99 | 103,5 | 0,83 | 2,57 | | | |
| cond. pressure | -25 | -13 | 161,2 | 551 | 138,8 | 1,34 | 4,56 | 1,15 | 120,7 | 0,89 | 3,49 | | | |
| pc= 45/113 | -15 | 5 | 281,3 | 961 | 242,1 | 1,83 | 6,24 | 1,57 | 153,9 | 1,01 | 6,13 | | | |
| return gas temp. | -10 | 14 | 361,0 | 1233 | 310,6 | 2,12 | 7,24 | 1,83 | 170,2 | 1,07 | 7,90 | | | |
| RGT= 32/90 | -5 | 23 | 454,9 | 1554 | 391,5 | 2,44 | 8,33 | 2,10 | 186,4 | 1,14 | 10,00 | | | |
| liquid temp | 0 | 32 | 564,1 | 1926 | 485,4 | 2,78 | 9,50 | 2,40 | 202,7 | 1,21 | 12,47 | | | |
| Tliq= 45/113 | 7,2 | 45 | 749,8 | 2561 | 645,3 | 3,31 | 11,31 | 2,85 | 226,5 | 1,32 | 16,75 | | | |
| [°C / °F] | -30 | -22 | 99,3 | 339 | 85,4 | 0,97 | 3,32 | 0,84 | 102,1 | 0,82 | 2,37 | | | |
| cond. pressure | -25 | -13 | 136,7 | 467 | 117,6 | 1,10 | 3,76 | 0,95 | 124,1 | 0,90 | 3,27 | | | |
| pc= 55/131 | -15 | 5 | 241,3 | 824 | 207,7 | 1,45 | 4,96 | 1,25 | 166,1 | 1,05 | 5,81 | | | |
| return gas temp | -10 | 14 | 310,5 | 1060 | 267,2 | 1,67 | 5,69 | 1,43 | 186,2 | 1,14 | 7,51 | | | |
| RGT= 32/90 | -5 | 23 | 392,0 | 1339 | 337,4 | 1,90 | 6,50 | 1,64 | 206,0 | 1,22 | 9,53 | | | |
| liquid temp | 0 | 32 | 486,9 | 1663 | 419,0 | 2,16 | 7,37 | 1,86 | 225,6 | 1,31 | 11,91 | | | |
| Tliq= 55/131 | 7,2 | 45 | 648,8 | 2216 | 558,3 | 2,56 | 8,74 | 2,20 | 253,6 | 1,44 | 16,05 | | | |

Model


| | | | | | |
|-------------|------------------|----------------------|----------------|-------------|-----------------|
| Designation | KLF6.6MFT | 208-230V/60Hz | Conf. 3 | Sales code: | 106G2701 |
|-------------|------------------|----------------------|----------------|-------------|-----------------|

Configuration

| | |
|------------------------|------------------|
| Motorconfiguration | CSIR |
| Power supply (nominal) | 208-230V/60Hz 1~ |
| Refrigerant | R134a |
| Application | MBP |
| Voltage range | 198-253V |
| Starting torque | HST |
| Approvals | VDE UL CCC |

Electrical accessories / wiring diagram

CSIR

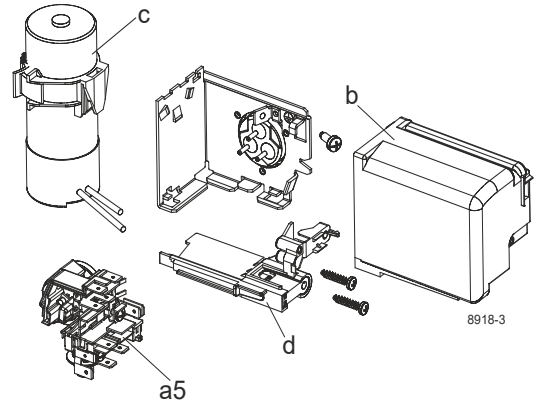



Ambient/ machine room temperatures minimum /maximum

Ambient temperature range: 10 - 43°C / 50 - 110°F



Machine room temperature range: 10 - 48°C / 50 - 119°F

Compressor cooling: fan 3m/s

Compressor with external protector. For max. operation envelope cooling on protector.

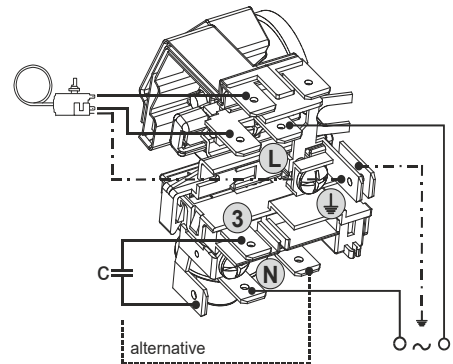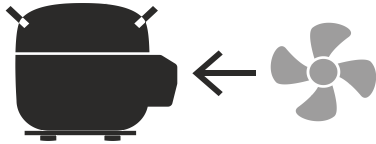

Operation pressure range

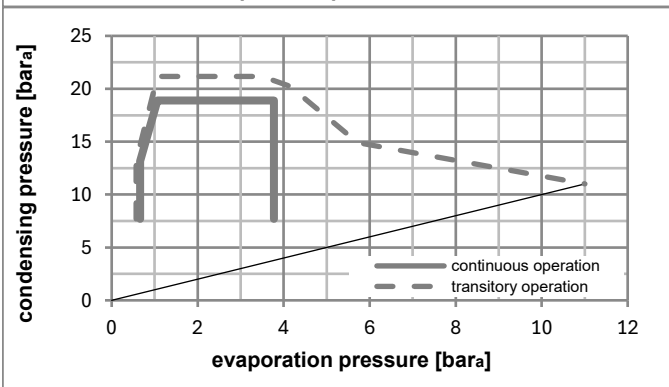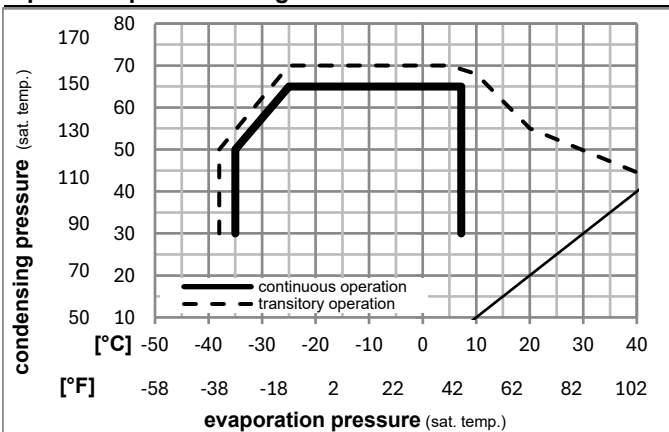

Components

| | | |
|------|------------------------------------|----------|
| a5 | current relay TY (T0377/L6-S1) | 117U7071 |
| c | start capacitor (80µF, 6.3mm) | 117U5001 |
| b, d | cover + clamp + screws(5VA) in bag | 103N1060 |

Alternative components

| | | |
|------|------------------------------------|----------|
| b, d | cover + clamp + screws(5VA-compl.) | 103N0600 |
|------|------------------------------------|----------|

Model

| | | | | | |
|-------------|------------------|----------------------|----------------|-------------|-----------------|
| Designation | KLF6.6MFT | 208-230V/60Hz | Conf. 3 | Sales code: | 106G2701 |
|-------------|------------------|----------------------|----------------|-------------|-----------------|

Optimization + standard conditions

R134a, 208V/60Hz, CSIR, fan 3m/s, VDE, UL, CCC

| | | Evaporating pressure (saturation temperature) | | | | Condensing pressure (saturation temperature) | | | Return gas temp. | | Liquid temp. | | Cooling capacity | | | COP | EER | Power consumption | | |
|------|------|---|------|------|------|--|---------|----------|------------------|----------|--------------|-------|------------------|--------|--|-----|-----|-------------------|--|-------------|
| | | pe | pc | RGT | Tliq | [W] | [Btu/h] | [kcal/h] | [W/W] | [Btu/Wh] | [kcal/Wh] | P1 | I | m | | | | | | |
| [°C] | [°F] | [°C] | [°F] | [°C] | [°F] | | | | | | | [W] | [A] | [kg/h] | | | | | | |
| -23 | -10 | 54 | 130 | 32 | 90 | 221,0 | 755 | 190,2 | 1,37 | 4,69 | 1,18 | 160,8 | 1,23 | 4,29 | | | | | | ASHRAE LBP |
| -25 | -13 | 55 | 131 | 32 | 90 | 161,3 | 551 | 138,8 | 1,05 | 3,59 | 0,91 | 153,3 | 1,21 | 3,86 | | | | | | cecomaf LBP |
| -35 | -31 | 40 | 104 | 20 | 68 | 108,5 | 370 | 93,4 | 1,04 | 3,56 | 0,90 | 104,2 | 1,11 | 2,38 | | | | | | EN12900 LBP |
| -7 | 20 | 54 | 130 | 35 | 95 | 474,8 | 1621 | 408,6 | 1,95 | 6,66 | 1,68 | 243,4 | 1,48 | 10,36 | | | | | | ASHRAE MBP |
| -10 | 14 | 55 | 131 | 32 | 90 | 367,4 | 1255 | 316,2 | 1,61 | 5,51 | 1,39 | 227,7 | 1,43 | 8,88 | | | | | | cecomaf MBP |
| -10 | 14 | 45 | 113 | 20 | 68 | 405,5 | 1385 | 349,0 | 1,93 | 6,58 | 1,66 | 210,6 | 1,37 | 9,49 | | | | | | EN12900 MBP |

Performance tables

R134a, 208V/60Hz, CSIR, fan 3m/s, VDE, UL, CCC

| | pe | | Cooling capacity | | | COP | EER | P1 | I | m | |
|------------------|------|------|------------------|---------|----------|-------|----------|-----------|-------|------|--------|
| | [°C] | [°F] | [W] | [Btu/h] | [kcal/h] | [W/W] | [Btu/Wh] | [kcal/Wh] | [W] | [A] | [kg/h] |
| [°C / °F] | -30 | -22 | 137,5 | 470 | 118,3 | 1,11 | 3,80 | 0,96 | 123,5 | 1,14 | 2,97 |
| cond. pressure | -25 | -13 | 187,1 | 639 | 161,0 | 1,29 | 4,41 | 1,11 | 144,8 | 1,19 | 4,05 |
| pc= 45/113 | -15 | 5 | 327,7 | 1119 | 282,0 | 1,74 | 5,94 | 1,50 | 188,4 | 1,30 | 7,14 |
| return gas temp. | -10 | 14 | 420,7 | 1437 | 362,1 | 2,00 | 6,82 | 1,72 | 210,6 | 1,37 | 9,21 |
| RGT= 32/90 | -5 | 23 | 530,2 | 1811 | 456,3 | 2,27 | 7,76 | 1,96 | 233,3 | 1,45 | 11,66 |
| liquid temp | 0 | 32 | 657,1 | 2244 | 565,5 | 2,56 | 8,76 | 2,21 | 256,3 | 1,52 | 14,53 |
| Tliq= 45/113 | 7,2 | 45 | 872,5 | 2980 | 750,9 | 3,01 | 10,27 | 2,59 | 290,2 | 1,64 | 19,49 |
| [°C / °F] | -30 | -22 | 115,4 | 394 | 99,3 | 0,90 | 3,06 | 0,77 | 128,6 | 1,15 | 2,75 |
| cond. pressure | -25 | -13 | 161,3 | 551 | 138,8 | 1,05 | 3,59 | 0,91 | 153,3 | 1,21 | 3,86 |
| pc= 55/131 | -15 | 5 | 286,3 | 978 | 246,4 | 1,41 | 4,82 | 1,22 | 202,8 | 1,35 | 6,89 |
| return gas temp | -10 | 14 | 367,4 | 1255 | 316,2 | 1,61 | 5,51 | 1,39 | 227,7 | 1,43 | 8,88 |
| RGT= 32/90 | -5 | 23 | 462,2 | 1579 | 397,8 | 1,83 | 6,25 | 1,57 | 252,7 | 1,51 | 11,24 |
| liquid temp | 0 | 32 | 571,7 | 1952 | 492,0 | 2,06 | 7,03 | 1,77 | 277,8 | 1,60 | 13,98 |
| Tliq= 55/131 | 7,2 | 45 | 757,0 | 2585 | 651,5 | 2,41 | 8,22 | 2,07 | 314,4 | 1,73 | 18,72 |

Model


| | | | | | |
|-------------|------------------|----------------------|----------------|-------------|-----------------|
| Designation | KLF6.6MFT | 208-230V/60Hz | Conf. 4 | Sales code: | 106G2701 |
|-------------|------------------|----------------------|----------------|-------------|-----------------|

Configuration

| | |
|------------------------|------------------|
| Motorconfiguration | RSCR |
| Power supply (nominal) | 208-230V/60Hz 1~ |
| Refrigerant | R134a |
| Application | MBP |
| Voltage range | 198-253V |
| Starting torque | LST |
| Approvals | VDE UL CCC |

Electrical accessories / wiring diagram

RSCR


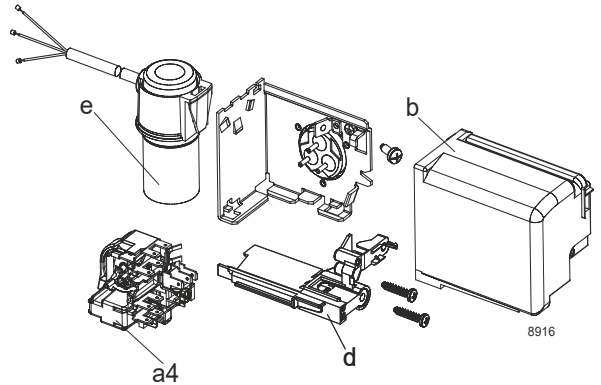


Ambient/ machine room temperatures minimum /maximum



| | |
|---------------------------------|------------------------|
| Ambient temperature range: | 10 - 43°C / 50 - 110°F |
| Machine room temperature range: | 10 - 48°C / 50 - 119°F |

Compressor cooling: fan 3m/s

Compressor with external protector. For max. operation envelope cooling on protector.

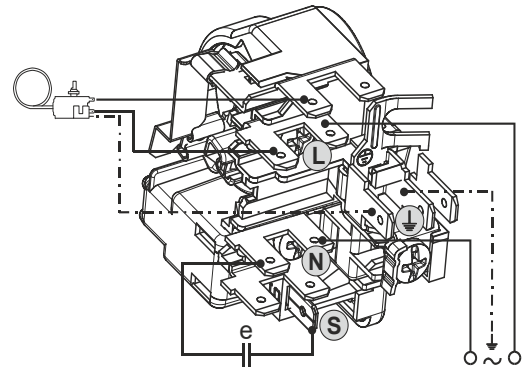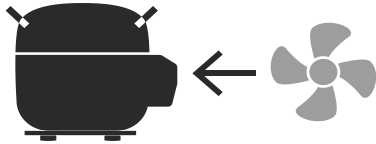

Operation pressure range

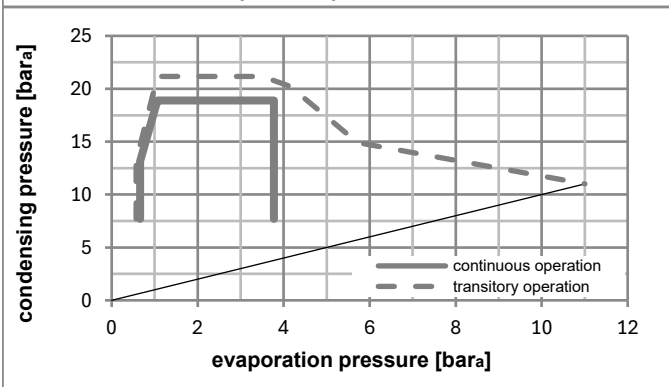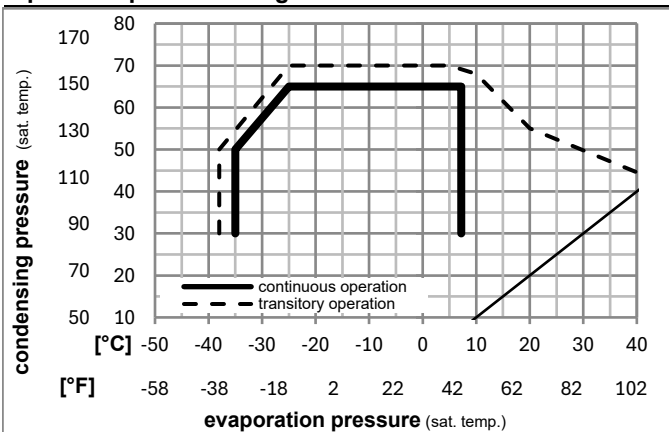

Components

| | | |
|------|------------------------------------|----------|
| a4 | DAS1 (PTC,6.3mm, T0377/L6 - S1) | 103N0250 |
| e | run capacitor (5µF, 6.3mm) | 117-7191 |
| b, d | cover + clamp + screws(5VA) in bag | 103N1060 |

Alternative components

| | | |
|----|---------------------------------|----------|
| a4 | ZAS1 (PTC,4.8mm, T0377/L6 - S1) | 103N0252 |
| e | run capacitor (5µF, 4.8mm) | 117-7190 |

| | | |
|------|------------------------------------|----------|
| b, d | cover + clamp + screws(5VA-compl.) | 103N0600 |
|------|------------------------------------|----------|

Model

| | | | | | |
|-------------|------------------|----------------------|----------------|-------------|-----------------|
| Designation | KLF6.6MFT | 208-230V/60Hz | Conf. 4 | Sales code: | 106G2701 |
|-------------|------------------|----------------------|----------------|-------------|-----------------|

Optimization + standard conditions

R134a, 208V/60Hz, RSCR, fan 3m/s, VDE, UL, CCC

| | | Evaporating pressure (saturation temperature) | | | | Condensing pressure (saturation temperature) | | | Return gas temp. | | Liquid temp. | | Cooling capacity | | | COP | EER | Power consumption | | |
|------|------|---|------|------|------|--|---------|----------|------------------|----------|--------------|-------|------------------|---------------------|--------|----------------|-----|-------------------|-------------|--|
| | | pe | pc | RGT | Tliq | [W] | [Btu/h] | [kcal/h] | [W/W] | [Btu/Wh] | [kcal/Wh] | P1 | I | Current consumption | | Ref. mass flow | | | | |
| [°C] | [°F] | [°C] | [°F] | [°C] | [°F] | [W] | [Btu/h] | [kcal/h] | [W/W] | [Btu/Wh] | [kcal/Wh] | [W] | [A] | [A] | [kg/h] | | | | | |
| -23 | -10 | 54 | 130 | 32 | 90 | 221,3 | 756 | 190,5 | 1,44 | 4,91 | 1,24 | 153,8 | 0,80 | 4,30 | | | | | ASHRAE LBP | |
| -25 | -13 | 55 | 131 | 32 | 90 | 161,5 | 551 | 139,0 | 1,10 | 3,76 | 0,95 | 146,7 | 0,77 | 3,86 | | | | | cecomaf LBP | |
| -35 | -31 | 40 | 104 | 20 | 68 | 108,5 | 371 | 93,4 | 1,08 | 3,68 | 0,93 | 100,8 | 0,60 | 2,38 | | | | | EN12900 LBP | |
| -7 | 20 | 54 | 130 | 35 | 95 | 475,8 | 1625 | 409,5 | 2,06 | 7,02 | 1,77 | 231,4 | 1,11 | 10,38 | | | | | ASHRAE MBP | |
| -10 | 14 | 55 | 131 | 32 | 90 | 368,1 | 1257 | 316,8 | 1,70 | 5,80 | 1,46 | 216,8 | 1,05 | 8,90 | | | | | cecomaf MBP | |
| -10 | 14 | 45 | 113 | 20 | 68 | 406,3 | 1388 | 349,7 | 2,03 | 6,92 | 1,74 | 200,6 | 0,98 | 9,51 | | | | | EN12900 MBP | |

Performance tables

R134a, 208V/60Hz, RSCR, fan 3m/s, VDE, UL, CCC

| | pe | | Cooling capacity | | | COP | EER | P1 | | | I | m |
|------------------|------|------|------------------|---------|----------|-------|----------|-----------|-------|------|--------|---|
| | [°C] | [°F] | [W] | [Btu/h] | [kcal/h] | [W/W] | [Btu/Wh] | [kcal/Wh] | [W] | [A] | [kg/h] | |
| [°C / °F] | -30 | -22 | 137,6 | 470 | 118,4 | 1,16 | 3,96 | 1,00 | 118,7 | 0,67 | 2,97 | |
| cond. pressure | -25 | -13 | 187,3 | 640 | 161,2 | 1,35 | 4,61 | 1,16 | 138,7 | 0,74 | 4,06 | |
| pc= 45/113 | -15 | 5 | 328,2 | 1121 | 282,5 | 1,83 | 6,24 | 1,57 | 179,6 | 0,90 | 7,15 | |
| return gas temp. | -10 | 14 | 421,5 | 1440 | 362,8 | 2,10 | 7,18 | 1,81 | 200,6 | 0,98 | 9,23 | |
| RGT= 32/90 | -5 | 23 | 531,4 | 1815 | 457,3 | 2,40 | 8,18 | 2,06 | 221,8 | 1,07 | 11,68 | |
| liquid temp | 0 | 32 | 658,7 | 2250 | 566,9 | 2,71 | 9,24 | 2,33 | 243,3 | 1,16 | 14,57 | |
| Tliq= 45/113 | 7,2 | 45 | 874,9 | 2988 | 753,0 | 3,18 | 10,87 | 2,74 | 274,8 | 1,29 | 19,54 | |
| [°C / °F] | -30 | -22 | 115,5 | 394 | 99,4 | 0,94 | 3,20 | 0,81 | 123,4 | 0,68 | 2,75 | |
| cond. pressure | -25 | -13 | 161,5 | 551 | 139,0 | 1,10 | 3,76 | 0,95 | 146,7 | 0,77 | 3,86 | |
| pc= 55/131 | -15 | 5 | 286,8 | 979 | 246,8 | 1,48 | 5,06 | 1,28 | 193,4 | 0,95 | 6,90 | |
| return gas temp | -10 | 14 | 368,1 | 1257 | 316,8 | 1,70 | 5,80 | 1,46 | 216,8 | 1,05 | 8,90 | |
| RGT= 32/90 | -5 | 23 | 463,3 | 1582 | 398,7 | 1,93 | 6,59 | 1,66 | 240,1 | 1,14 | 11,26 | |
| liquid temp | 0 | 32 | 573,2 | 1957 | 493,3 | 2,18 | 7,43 | 1,87 | 263,4 | 1,24 | 14,02 | |
| Tliq= 55/131 | 7,2 | 45 | 759,4 | 2593 | 653,5 | 2,56 | 8,73 | 2,20 | 297,0 | 1,38 | 18,78 | |