

Single Packs

SECOP

Single Pack BD1.4F-AUTO.3 12V DC PM

Single pack code number: **195B3449**

Position	Title	Code	Amount
1	Compressor BD1.4F	109Z0106	1
2	Electronic unit 12V DC	101N1001	1
3	Bolt joint for one compressor M6 ø16mm	118-1917	1

Secop GmbH • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • www.secop.com

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved.

BD1.4F-AUTO.3 Direct Current Compressor R134a, R1234yf 12V DC



General

Code number (without electronic unit)	109Z0106
Electronic unit - Automotive	101N1000, 30 pcs: 101N1001
Electronic unit - Automotive	101N1010, 30 pcs: 101N1011
Approvals	–
Compressors on pallet	180

Application

Application		LBP/MBP
Evaporating temperature	°C	-25 to 5
Voltage range	VDC	8.5 - 17
Max. condensing temperature continuous (short)	°C	60 (70)
Max. winding temperature continuous (short)	°C	125 (135)

Cooling requirements

Application	LBP	MBP	HBP
32°C	S	S	–
38°C	S	S	–
43°C	S	S	–

Remarks on application:

- New generation with optimized noise level
- New generation also released for R1234yf

Motor

Motor type		permanent magnet, brushless DC
Speed	rpm	3,000
Resistance, all 3 windings (25°C)	mΩ	370

Design


Displacement	cm ³	1.41
Oil quantity (type)	cm ³	75 (polyolester)
Maximum refrigerant charge	g	70
Free gas volume in compressor	cm ³	500
Weight - Compressor/Electronic unit	kg	2.1/0.17

Standard battery protection settings (refer to 101N1000 Instructions for optional settings)


Voltage		Min. value	Default	Max. value
Cut out	(0.1 steps) VDC	8.5	8.5	17
Cut in diff.	(0.1 steps) VDC	0.5	0.5	8

Dimensions

Height	mm	A	96.25
		B	91.25
		B1	88.00
		B2	25.20
Suction connector	location/I.D. mm angle	C	6.2 25°
	material comment	Cu-plated steel Al cap	
Process connector	location/I.D. mm angle	D	6.2 25°
	material comment	Cu-plated steel Al cap	
Discharge connector	location/I.D. mm angle	E	5.0 0°
	material comment	Cu-plated steel Al cap	
Connector tolerance	I.D. mm	±0.09, on 5.0 +0.12/+0.20	
Remarks			

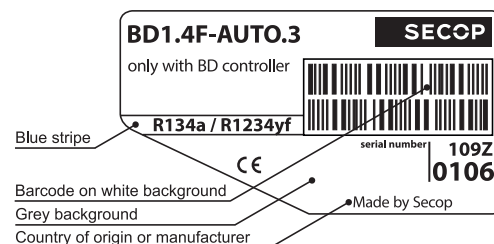

- S = Static cooling normally sufficient
- O = Oil cooling
- F₁ = Fan cooling 1.5 m/s (compressor compartment temperature equal to ambient temperature)
- F₂ = Fan cooling 3.0 m/s necessary
- SG = Suction gas cooling normally sufficient
- = not applicable in this area

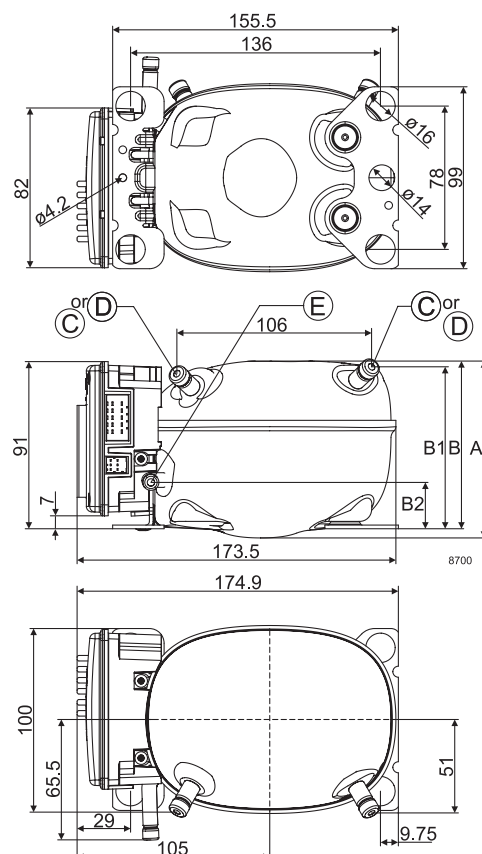

Performance Data with Refrigerant R134a & R1234yf

EN 12900 Household (CECOMAF), R134a

Evap. temp. in °C	-25	-23.3	-20	-15	-10	-6.7	-5	0	5
Capacity in W	16.1	19.2	25.7	37.4	51.2	61.5	67.1	85.2	105.4
Power cons. in W	24.1	25.7	29.0	34.1	39.3	42.9	44.7	50.3	56.0
Current cons. in A	1.84	1.96	2.20	2.59	2.99	3.26	3.40	3.84	4.29
COP in W/W	0.67	0.74	0.89	1.10	1.30	1.43	1.50	1.69	1.88

EN 12900 Household (CECOMAF), R1234yf

Evap. temp. in °C	-25	-23.3	-20	-15	-10	-6.7	-5	0	5
Capacity in W	17.4	20.5	27.2	38.8	52.0	61.5	66.7	82.7	99.9
Power cons. in W	26.5	28.2	31.4	36.3	41.1	44.3	45.9	50.6	55.2
Current cons. in A	2.02	2.15	2.39	2.76	3.13	3.37	3.50	3.86	4.22
COP in W/W	0.66	0.73	0.87	1.07	1.26	1.39	1.45	1.63	1.81

ASHRAE LBP, R134a

Evap. temp. in °C	-25	-23.3	-20	-15	-10	-6.7	-5	0	5
Capacity in W	20.2	23.9	32.0	46.5	63.7	76.4	83.5	106.0	131.3
Power cons. in W	24.0	25.7	29.0	34.0	39.2	42.8	44.6	50.1	55.8
Current cons. in A	1.84	1.96	2.20	2.59	2.98	3.25	3.40	3.82	4.27
COP in W/W	0.84	0.93	1.11	1.37	1.62	1.79	1.87	2.12	2.35

ASHRAE LBP, R1234yf

Evap. temp. in °C	-25	-23.3	-20	-15	-10	-6.7	-5	0	5
Capacity in W	22.7	26.8	35.4	50.4	67.5	80.0	86.7	107.7	130.4
Power cons. in W	26.4	28.1	31.3	36.2	41.0	44.1	45.7	50.4	54.9
Current cons. in A	2.37	2.53	2.85	3.34	3.83	4.16	4.33	4.81	5.29
COP in W/W	0.93	1.02	1.20	1.45	1.69	1.84	1.92	2.13	2.32


Test conditions	EN 12900/CECOMAF	ASHRAE LBP
Condensing temperature	55°C	54.4°C
Ambient temperature	32°C	32°C
Suction gas temperature	32°C	32°C
Liquid temperature	no subcooling	32°C

Operational errors

Error code	Error type
	Can be read out in the software TOOL4COOL®
7	Communication failure
6	Thermostat failure (If the NTC thermistor is short-circuit or has no connection, the electronic unit will enter manual mode).
5	Thermal cut-out of electronic unit (If the refrigeration system has been too heavily loaded, or if the ambient temperature is high, the electronic unit will run too hot).
4	Minimum motor speed error (If the refrigeration system is too heavily loaded, the motor cannot maintain minimum speed at approximately 1,850 rpm).
3	Motor start error (The rotor is blocked or the differential pressure in the refrigeration system is too high (>5 bar)).
2	Fan over-current cut-out (The fan loads the electronic unit with more than 0.65A _{peak}).
1	Battery protection cut-out (The voltage is outside the cut-out setting).

Accessories for BD1.4F-AUTO.3

Mounting	Code number
Bolt joint for one compressor Ø: 16 mm	118-1917
Bolt joint in quantities Ø: 16 mm	118-1918
Snap-on in quantities Ø: 16 mm	118-1919
One Wire/LIN gateway	105N9501
Not deliverable from Secop	
Automobile fuse DIN 7258	15A

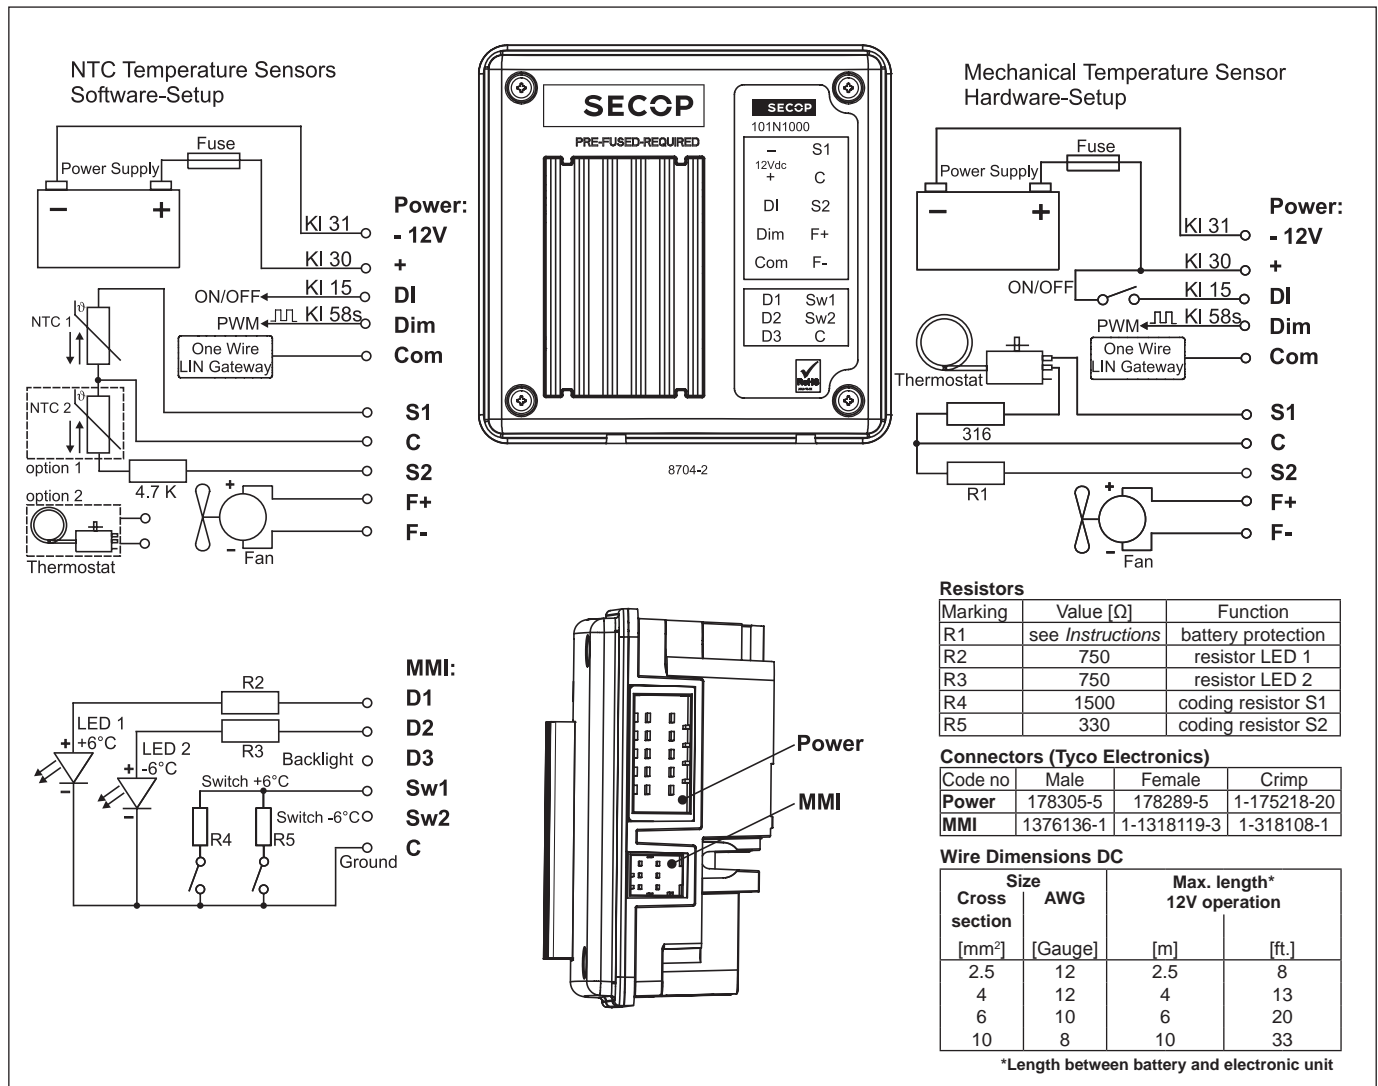

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without substantial changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved. www.secop.com




Instructions for Electronic Units
are available for download on
www.secop.com




BD Compressors

SECCP

Service/Repair



8545



R290



R600a




R170



R1234yf




BD Nano




Do not heat up the bottom of the discharge connector directly.
Do not braise longer than 10 seconds and wait for 5 minutes for the next soldering attempt (Product Bulletin DES.N.101.M1).


BD Micro

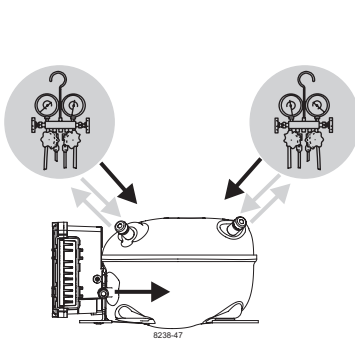

BD P-Housing

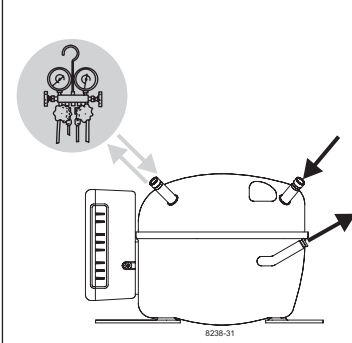

BD T-Housing

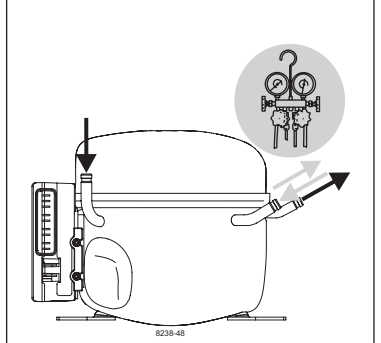

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved. www.secop.com