

Single Packs

SECO[®]P

Single Pack NF11FX 115-127V 60Hz CSIR

Single pack code number: **195B4014**

| Position | Title | Code | Amount |
|----------|--|----------|--------|
| 1 | Compressor NF11FX | 105G5951 | 1 |
| 2 | Bolt joint for one compressor M6 ø16mm | 118-1917 | 1 |

Secop GmbH • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • www.secop.com

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved.

NF11FX Standard Compressor R134a 115-127V 60Hz

General

| | |
|--|----------|
| Code number (pre-assembled CSIR start equipment) | 105G5951 |
| Approvals | UL984 |
| Compressors on pallet | 80 |

Application

| Application | LBP/MBP | | | |
|--|---------|----|-----------|--|
| Frequency | Hz | 50 | 60 | |
| Evaporating temperature | °F | – | -31 to 45 | |
| Voltage range | V | – | 95 - 135 | |
| Max. condensing temperature continuous (short) | °F | – | 140 (158) | |
| Max. winding temperature continuous (short) | °F | – | 257 (275) | |

Cooling requirements

| | | | |
|---|-----|-----|----------------|
| Frequency | Hz | 50 | 60 |
| Application | LBP | MBP | HBP |
| 90°F | – | – | F ₂ |
| 100°F | – | – | F ₂ |
| 110°F | – | – | F ₂ |
| Remarks on application: Below 0°F only for 115V 60Hz nominal. | | | |

Motor



| | | | |
|---|------|------|-----|
| Motor type | CSIR | | |
| LRA (rated after 4 sec. UL984), HST LST | A | 43.1 | – |
| Cut in Current, HST LST | A | 43.1 | – |
| Resistance, main start winding (77°F) | Ω | 1.0 | 3.6 |

Design


| | | |
|-------------------------------------|--------|---------------------|
| Displacement | cu.in | 0.68 |
| Oil quantity (type) | fl.oz. | 10.14 (polyolester) |
| Maximum refrigerant charge | oz. | 14.0 |
| Free gas volume in compressor | fl.oz. | 79.7 |
| Weight without electrical equipment | lbs. | 22.0 |

Dimensions

| | | | |
|----------------------|----------------------------|----|----------------------|
| Height | inch | A | 8.00 |
| | | B | 7.76 |
| | | B1 | – |
| | | B2 | – |
| Suction connector | location, I.D. in. angle | C | 0.320-0.327 15° |
| | material comment | | Copper Rubber plug |
| Process connector | location, I.D. in. angle | D | 0.252-0.259 25° |
| | material comment | | Copper Rubber plug |
| Discharge connector | location, I.D. in. angle | E | 0.252-0.259 35° |
| | material comment | | Copper Rubber plug |
| Oil cooler connector | location, I.D. in. angle | F | – |
| | material comment | | – |
| Remarks: | | | |

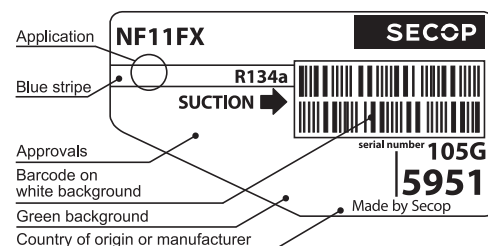

- S = Static cooling normally sufficient
- O = Oil cooling
- F₁ = Fan cooling 1.5 m/s
(compressor compartment temperature equal to ambient temperature)
- F₂ = Fan cooling 3.0 m/s necessary
- SG = Suction gas cooling normally sufficient
- = not applicable in this area

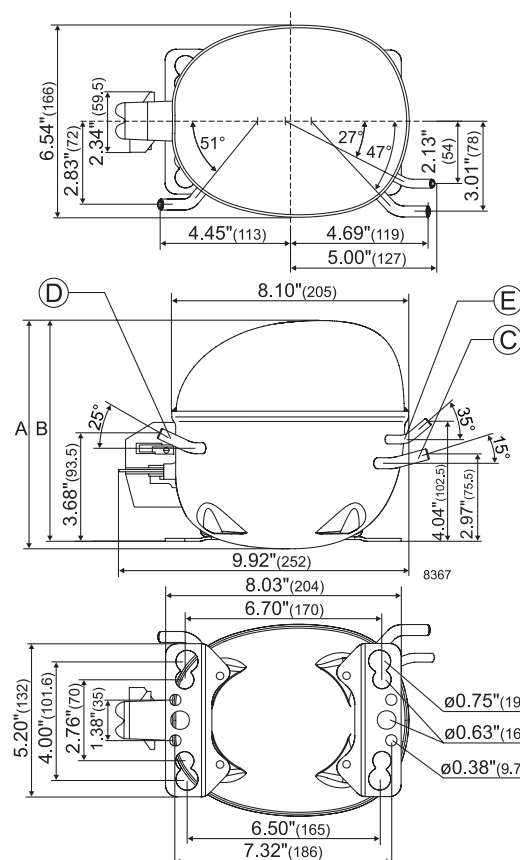

ASHRAE LBP

 115V, 60Hz, fan cooling F₂

| | | | | | | | | | | | | | | | | | |
|--------------------|-----|-----|------|------|------|------|------|------|------|------|------|------|------|------|----|----|----|
| Evap. temp. in °F | -49 | -40 | -30 | -20 | -13 | -10 | 0 | 10 | 14 | 20 | 30 | 40 | 41 | 45 | 50 | 59 | 68 |
| Capacity in BTU/h | | | 502 | 774 | 996 | 1101 | 1498 | 1980 | 2200 | 2564 | 3265 | 4101 | 4193 | 4569 | | | |
| Power cons. in W | | | 218 | 254 | 283 | 295 | 341 | 390 | 410 | 441 | 495 | 550 | 556 | 578 | | | |
| Current cons. in A | | | 4.26 | 4.52 | 4.72 | 4.81 | 5.12 | 5.45 | 5.59 | 5.81 | 6.19 | 6.60 | 6.64 | 6.81 | | | |
| EER in BTU/Wh | | | 2.30 | 3.05 | 3.53 | 3.73 | 4.39 | 5.08 | 5.37 | 5.81 | 6.59 | 7.45 | 7.54 | 7.90 | | | |

ASHRAE MBP


 115V, 60Hz, fan cooling F₂

| | | | | | | | | | | | | | | | | | |
|--------------------|-----|-----|------|------|------|------|------|------|------|------|------|------|------|------|----|----|----|
| Evap. temp. in °F | -49 | -40 | -30 | -20 | -13 | -10 | 0 | 10 | 14 | 20 | 30 | 40 | 41 | 45 | 50 | 59 | 68 |
| Capacity in BTU/h | | | 447 | 690 | 887 | 980 | 1333 | 1761 | 1957 | 2279 | 2900 | 3639 | 3720 | 4050 | | | |
| Power cons. in W | | | 218 | 254 | 283 | 295 | 341 | 390 | 410 | 441 | 495 | 550 | 556 | 578 | | | |
| Current cons. in A | | | 4.26 | 4.52 | 4.72 | 4.81 | 5.12 | 5.45 | 5.59 | 5.81 | 6.19 | 6.60 | 6.64 | 6.81 | | | |
| EER in BTU/Wh | | | 2.05 | 2.71 | 3.14 | 3.32 | 3.91 | 4.52 | 4.77 | 5.16 | 5.86 | 6.61 | 6.69 | 7.00 | | | |

EN 12900 Household (CECOMAF)


 115V, 60Hz, fan cooling F₂

| | | | | | | | | | | | | | | | | | |
|--------------------|-----|-----|------|------|------|------|------|------|------|------|------|------|------|------|----|----|----|
| Evap. temp. in °F | -49 | -40 | -30 | -20 | -13 | -10 | 0 | 10 | 14 | 20 | 30 | 40 | 41 | 45 | 50 | 59 | 68 |
| Capacity in BTU/h | | | 409 | 629 | 809 | 893 | 1213 | 1601 | 1778 | 2069 | 2631 | 3299 | 3372 | 3671 | | | |
| Power cons. in W | | | 218 | 255 | 283 | 296 | 341 | 391 | 411 | 443 | 497 | 553 | 558 | 581 | | | |
| Current cons. in A | | | 4.26 | 4.52 | 4.72 | 4.81 | 5.12 | 5.46 | 5.60 | 5.82 | 6.21 | 6.62 | 6.66 | 6.83 | | | |
| EER in BTU/Wh | | | 1.87 | 2.47 | 2.86 | 3.02 | 3.55 | 4.10 | 4.32 | 4.67 | 5.29 | 5.97 | 6.04 | 6.32 | | | |

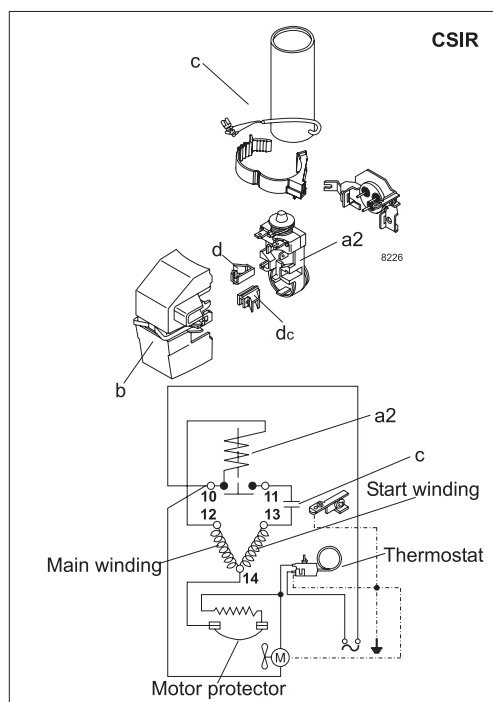


| Accessories for NF11FX (pre-assembled CSIR start equipment) | Figure | Code number | Test conditions | ASHRAE LBP | ASHRAE MBP | EN 12900/ CECOMAF |
|--|--------|-------------|--------------------|--------------------|---------------|----------------------|
| Starting relay 1/4 in. spade connect. | a2 | 117U4123 | Condensing temp. | 130°F | 130°F | 131°F |
| Protector 3/4 in. Texas Instruments | | MRT16AFZ-6 | Ambient temp. | 90°F | 95°F | 90°F |
| Start. capacitor 410 µF 1/4 in. spade connect. | c | 117U5028 | Suction gas temp. | 90°F | 95°F | 90°F |
| Cover | b | 117U1021 | Liquid temperature | 90°F | 115°F | no subcooling |
| Cord relief | d | 117U0349 | | | | |
| Cord relief for capacitor | dc | 117U0349 | | | | |
| Mounting accessories | | | | Code number | | |
| Bolt joint for one comp. Ø: 5/8 in. | | | | 118-1917 | | |
| Bolt joint in quantities Ø: 5/8 in. | | | | 118-1918 | | |
| Snap-on in quantities Ø: 5/8 in. | | | | 118-1919 | | |


Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequential changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved. www.secop.com

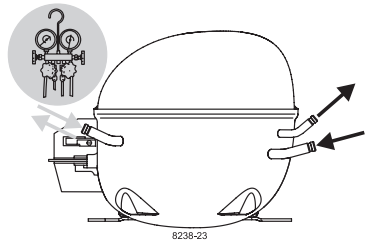

NF Compressors


SECOP

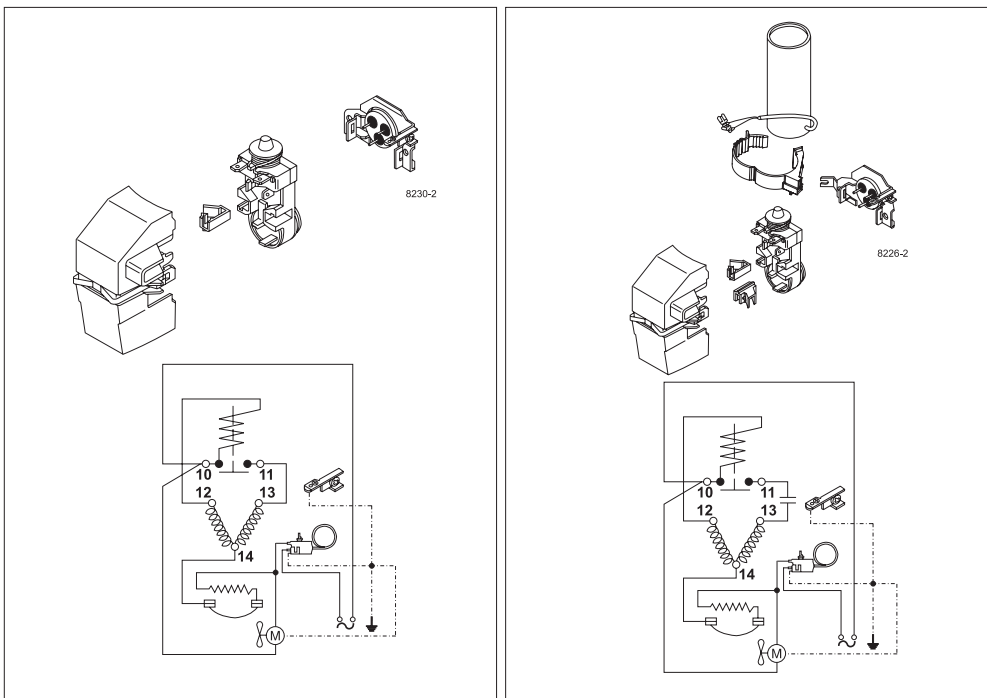

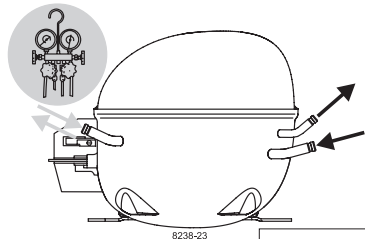

NF Compressors

SECOP

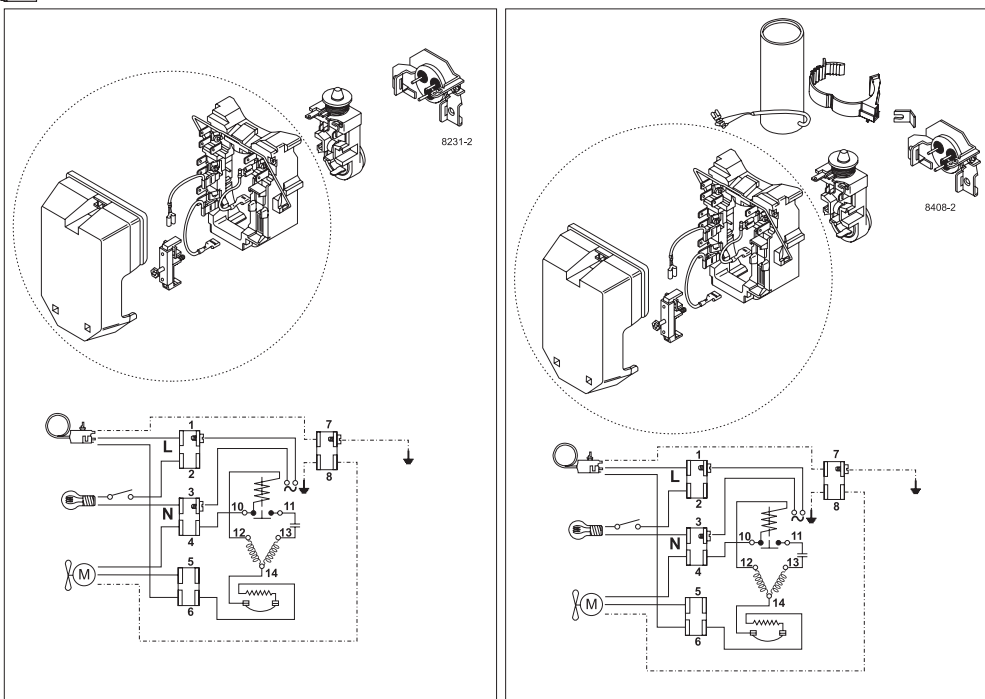

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved. www.secop.com